


READERS WITH TRICOLOR LED

CZ-3-S ARES (xxx)

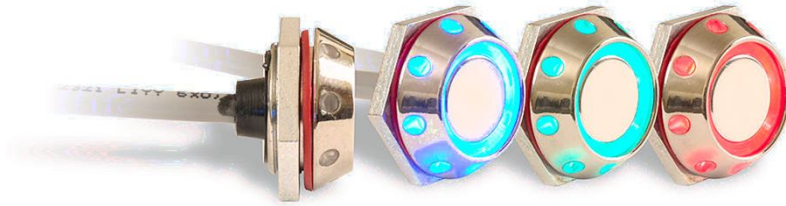

Can work with any access control device, M*20 thread,


Chromium plated steel casing

Good solution for temperature and humidity loggers

Probe with tricolour RGB-LED, standard wire - 40 cm

Possibility to obtain 6 colours

Will work in Touch and Hold mode

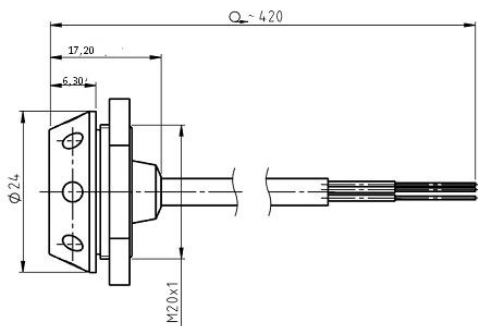

WIRES	
	DATA
	GND
	RED LED
	BLUE LED
	GREEN LED
	COMMON LEAD

Technical Data

The reader is designer to work with Maxim Dallas chips series DS19xx

1. Max voltage on readers contact	12V
2. Max RED LED power suply	2 V
2. Max GREEN LED power suply	3,2 V
2. Max BLUE LED power suply	3,2 V
3. Max electricity consumption	20mA
4. Application	Acces control device
5. Casing	Metal
6. Ring material	Ferrite steel + Cu + Ni + Cr+3
7. Signal joint material	Brass + Ni +Cr+3
8. Cable	5*0,14mm ²
9. Fastening method	M20x1 screw
10. LED Kingbright	KPB-3025SURKCGKC
11. Work enviroment	Residential, commercial and lightly industrial
12. Working temperature	-40 °C do +85 °C
13. Humidity	Up to 70%